


Huddly ONE

Work From Anywhere Kit



For home and private office.




Huddly ONE

Work From Anywhere Kit

Product Information

Weight: 120 g / 0.26 lbs

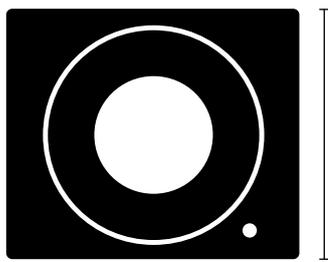

4.0 cm / 1.6 in

3.5 cm / 1.4 in

6.4 cm / 2.52 in



7.2 cm / 2.82 in

Specifications

Image

- 12 Megapixels 1/2.3" CMOS sensor
- 1080p Full HD @ 30 fps
- 720p HD @ 30 fps
- 16:9 aspect ratio output
- UVC 1.1 plug-and-play compatible

Optics

- Ultra-wide angle glass optics
- Horizontal field of view 120°
- Vertical field of view 90°
- Diagonal field of view 150°
- f/2.8 aperture

Connectivity

- USB Type-C connector
- SuperSpeed USB 3
- HighSpeed USB 2
- Power requirement 5V 900mA

Hardware

- Aluminum unibody construction
- High-performance video processing engine
- Neural compute engine
- Embedded mounting hinge
- Camera tripod mount

Color

Matte Black

Packaging Dimensions

L: 102 mm x W: 82 mm x H: 80 mm

Certification



Huddly ONE

Work From Anywhere Kit

Product Information

Features

Desktop Framing

A default zoom level customized to best suit the one-person home office scenario. The framing can be adjusted to suit personal preference anytime.

Digital Pan/Tilt/Zoom

The camera has no moving parts, allowing Pan, Tilt, and Zoom functions to be adjusted smoothly, silently and instantly.

Software-Upgradable

The camera gets even smarter over time with regular software enhancements and new intelligent features.


Real-Time Dewarping

The camera's wide-angle image is dewarped and perspective corrected in real time, rendering a natural, true-to-life view.

Portrait Lighting

The camera uses AI to understand the lighting conditions in the image. It automatically adjusts exposure to ensure that faces are well-lit and facial expressions are clearly visible.

Room Example

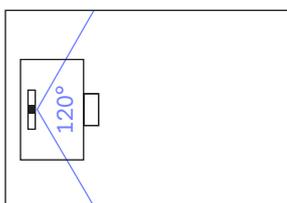


Home Office

Huddly ONE

Work From Anywhere Kit

Accessories

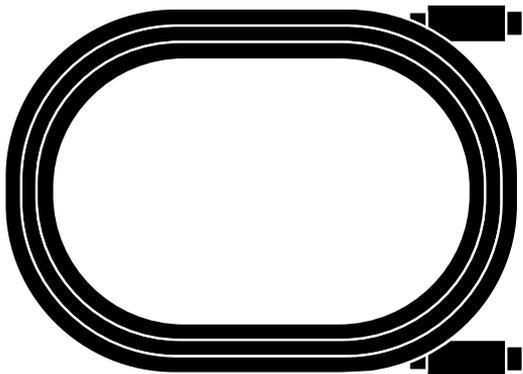

Cable 0.6 m

USB 3

C to C

GTIN 7090043790337

Dimensions & Type

Length	0.6 m
Connectors	C to C
Color	Black
Weight	29 g
Cable diameter	4.0 mm

Temperature

Operating temperature	0 – 50°C
-----------------------	----------

USB Support


USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

Power

Voltage	5 V
Rated current (max)	900 mA

Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-HB

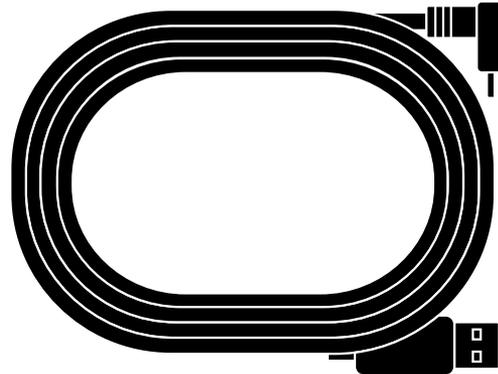

Cable 2 m

USB 3

C to A

GTIN 7090043790276

Dimensions & Type

Length	2.0 m
Connectors	A to C (angled)
Color	Black
Weight	70 g
Cable diameter	4.5 mm

Temperature

Operating temperature	0 – 50°C
-----------------------	----------

USB Support

USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

Power

Voltage	5 V
Rated current (max)	3 A

Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0