PREMIUM AUDIO FOR AV CONFERENCING MICROFLEX® ADVANCE[™]

©2020-2023 Shure Incorporated. SHURE and the SHURE logotype are registered trademarks of Shure Incorporated or Shure Acquisition Holdings, Inc. For additional information, see shure.com/trademarks.





AV conferencing has become an essential tool for communication. But it's easy to forget that the most important content is often carried by the audio, not the video. If the video fails, the meeting can go on; but if the audio fails, the meeting is over.

Poor audio inhibits productivity and fatigues meeting participants. Superior audio can transform your meetings from an exhausting struggle into a forum that supports creativity and productive teamwork.



SHURE?

Shure is uniquely positioned as a leading audio equipment manufacturer serving corporate, education, government, broadcast/TV/film, and independent content creators. By choosing Shure, you will enjoy a range of benefits:

Compatibility and certification with leading software and hardware collaboration platforms; compliance with international regulatory standards.

WHY CHOOSE

Nearly 100-year heritage of technical leadership in high-quality audio, acoustics, wireless, DSP, software, and audio networking technologies.

Broad product selection that can be customized to meet the needs of any user, space, or application – from simple to complex, small to large.

Award-winning global support infrastructure.

ADVANTAGES

MXA902 INTEGRATED CONFERENCING CEILING ARRAY 🕂



Microflex Advance networked array microphones rely on a suite of advanced technologies to deliver accurate audio in any environment.

PRECISE COVERAGE

Controlling which sounds are picked up is the foundation of good audio. The MXA901 and MXA902 feature Automatic Coverage[™] technology. The MXA 710 and MXA310 feature Steerable Coverage[™] technology. The MXA920 includes both Automatic and Steerable Coverage technology.

POWERFUL DSP


Digital signal processing blends microphone signals into a harmonious mix. The MXA920, MXA902, MXA901, and MXA710 feature IntelliMix DSP that controls levels and eliminates noise and echo. The MXA310 includes automatic mixing and per-channel EQ for improved clarity.


Single-Zone Automatic Coverage[™] technology captures everyone within a defined seating area and provides a single audio output mix.

Multi-Zone Automatic Coverage[™] technology allows you to define up to 8 distinct coverage zones, like seating areas, a podium, and white board, and provides a single audio output mix.



Since their introduction, Microflex[®] Advance[™] Networked Array Microphones have been the premier choice for audio in the most challenging environments. They capture voice naturally, fit harmoniously with the room's appearance, and make it effortless to connect people for the world's leading enterprises. The industry-leading Microflex Advance microphones have revolutionized versatile and elegant AV conferencing solutions that discreetly and precisely capture every word.






MXA ARRAY TECHNOLOGY

FLEXIBLE NETWORKING

Digital audio, power, and control data use Dante or AES67 to coexist on the same network as enterprise applications. Command strings enable integration with third-party systems for camera tracking or room control.

Steerable Coverage[™] technology

lets you configure up to 8 pickup lobes with individual audio outputs. This is ideal for applications like voice lift that require multiple microphone and loudspeaker zones.



MXA920 CEILING ARRAY MICROPHONE

NOW, PRISTINE AUDIO IS AUTOMATIC.

CEILING ARRAY MICROPHONE

The MXA920 is the premier ceiling array microphone for contemporary meeting spaces. Multi-zone Automatic Coverage[™] technology covers up to a 30 x 30 ft (9 x 9 m) area automatically, or place coverage in specific areas for more precise control of audio capture. With next generation array architecture for enhanced directional pickup and more natural speech, the MXA920 is even easier to use and faster to deploy than the MXA910 for AV conferencing, camera tracking, voice lift, or sound reinforcement.

COVERAGE WHERE YOU WANT IT

Certified for

zoom

Microsoft Teams

Certified

Multi-zone Automatic Coverage[™] technology captures up to a 30 x 30 foot (9 x 9 m) area automatically for great sound out of the box.

You can also place coverage areas in specific locations to limit audio capture to seating areas, a podium, or whiteboard.

SEAMLESS INTEGRATION

Next-generation array architecture delivers more directional pickup at low frequencies for more natural sounding voice.

Onboard IntelliMix DSP with automatic mixing, echo cancellation, noise reduction, and automatic gain control provides a pristine audio mix.

FITS YOUR ROOM DESIGN

Square or round form factors suit your interior design. Choose white, black, or aluminum finish (square available in white only), or paint to match room aesthetics.

Versatile hardware options support in-ceiling, on-ceiling, pole, or wirerope mounting.

READY FOR ANYTHING

Camera Tracking

Precise talker localization reports the position of simultaneous talkers for more accurate camera tracking.

Voice Lift

Highly directional pickup allows audience members across the room to interact without the need for roving microphones.

Sound Reinforcement

Precise coverage control enables presenters to be amplified without lavalier or gooseneck microphones.



CEILING ARRAY MICROPHONE

AVAILABLE MODELS

MXA920AL-R Round Ceiling Array Microphone, 25-inch (aluminum)		
MXA920B-R Round Ceiling Array Microphone, 25-inch (black)		
MXA920W-R Round Ceiling Array Microphone, 25-inch (white)		
IXA920W-S Square Ceiling Array Microphone, 24-inch (white)		
MXA920W-S-60CM Square Ceiling Array Microphone, 60 cm (white)		

ACCESSORIES

MXA-MUTE Network Mute Button	Touch-sensitive mute button with programmable switch and LED can control one or multiple MXA microphones or DSP units
A900-PM Pole Mounting Kit	Allows MXA902/920 microphones to be suspended using threaded rod or NPT pole
A900-GM Gripple Mounting Kit	Allows MXA902/920 microphones to be suspended from the ceiling using Gripple fittings
A910-HCM Hard Ceiling Mount	Allows MXA902/MXA920-S to be mounted flush in a hard or drywall ceiling
A910-JB Junction Box Adapter	Allows MXA902/MXA920-S to be connected to wiring in electrical conduit

INTEGRATED CONFERENCING CEILING ARRAY



MXA902 INTEGRATED CONFERENCING CEILING ARRAY

THE FASTEST WAY TO BETTER SOUND.

The MXA902 is the first integrated ceiling array and loudspeaker for AV conferencing. It delivers premium audio capture and reproduction in small to medium-sized meeting spaces - with just one device. The MXA902 combines an advanced array microphone with an integrated loudspeaker for natural sounding speech reproduction. Single-Zone Automatic Coverage™ technology captures every participant, a wide-dispersion loudspeaker delivers robust sound throughout the room, and onboard IntelliMix® DSP ensures echo- and noise-free audio.

ADVANCED ARRAY MICROPHONE

Single-Zone Automatic Coverage technology captures every talker in a 20 x 20 foot (6 x 6 m) area automatically with no configuration required.

Next-generation array architecture provides full-range speech capture and consistent directional performance even at lower frequencies.

INTEGRATED LOUDSPEAKER

Wide-dispersion loudspeaker delivers clear, robust far-site audio that fills the room.

With just PoE+ power it generates up to 86 dB SPL with no additional amplification required.

INTELLIMIX DSP

Industry-leading automatic mixing, acoustic echo cancellation, noise reduction, automatic gain control, and EQ provide an automix output with outstanding speech clarity.

The loudspeaker signal is automatically assigned as the AEC reference so no additional signal routing is necessary.


FITS YOUR ROOM DESIGN

Add MXA-MUTE buttons for convenient audio muting or use your room control system.

Compatible with the A900 family of mounting hardware options to support in-ceiling, on-ceiling, pole, or wire-rope mounting.

White finish is paintable to match your room aesthetics.



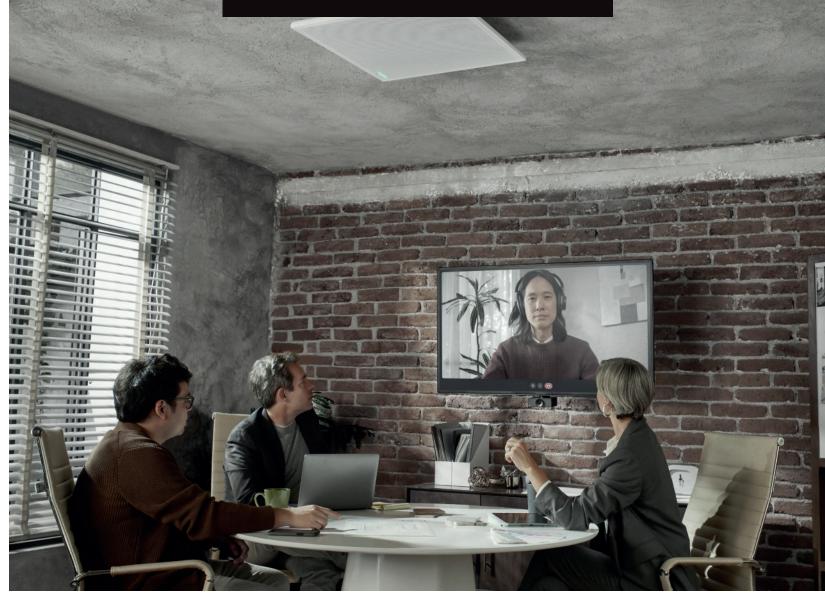

INTEGRATED CONFERENCING CEILING ARRAY

AVAILABLE MODELS

MXA902W-S Square Integrated Conferencing Array, 24-inch (white) MXA902W-S-60CM Square Integrated Conferencing Array, 60 cm (white)

ACCESSORIES

MXA-MUTE Network Mute Button	Touch-sensitive mute button with programmable switch and LED can control one or multiple MXA microphones or DSP units
A900-CM Ceiling Mount	Allows MXA902/920 ceiling array microphones to be attached directly to the ceiling
A900-PM Pole Mounting Kit	Allows MXA902/920 microphones to be suspended using threaded rod or NPT pole
A900-GM Gripple Mounting Kit	Allows MXA902/920 microphones to be suspended from the ceiling using Gripple fittings
A910-HCM Hard Ceiling Mount	Allows MXA902/MXA920-S to be mounted flush in a hard or drywall ceiling
A910-JB Junction Box Adapter	Allows MXA902/MXA920-S to be connected to wiring in electrical conduit

CONFERENCING CEILING ARRAY MICROPHONE



MXA901 CONFERENCING CEILING ARRAY MICROPHONE

A SLEEKER TAKE ON TECH.

The Microflex Advance MXA901 Conferencing Ceiling Array Microphone is the most discreet approach to AV conferencing audio for meeting rooms. Its compact and stylish 13.5-in diameter (34 cm) form factor complements any interior design without drawing attention. With Single-Zone Automatic Coverage technology and advanced IntelliMix DSP, the MXA901 captures multiple talkers at once for more dynamic interaction without annoying echo or room noise. One MXA901 can cover a small or medium-size room; multiple MXA901's can be combined to cover larger spaces with the IntelliMix P300 audio processor or IntelliMix Room software.

COVER EVERYONE

Single-Zone Automatic Coverage technology automatically captures every talker in a 20 by 20 foot (6 by 6 m) area with no configuration required.

Use one MXA901 in small or medium-size rooms or use multiple MXA901's to cover larger spaces.

CANCEL THE CLUTTER

Industry-leading IntelliMix[®] DSP automatically aims microphone coverage at talkers and removes echo and room noise.

Automatic gain control adjusts in-room talker levels so that everyone is heard clearly.

SCALE IT UP

Add the IntelliMix P300 or IntelliMix Room DSP to connect multiple MXA901's to a room computer or video codec.


Add MXA-MUTE buttons for convenient audio muting from the table or use your room control system.

FITS YOUR ROOM DESIGN

On-ceiling mounting bracket included; versatile options for in-ceiling, pole, rod, or suspension mounting available.

Choose from white, black, or aluminum finishes to match your color scheme.







CONFERENCING CEILING ARRAY MICROPHONE

AVAILABLE MODELS

MXA901AL-R Aluminum ceiling microphone with on-ceiling mount MXA901B-R Black ceiling microphone with on-ceiling mount MXA901W-R White ceiling microphone with on-ceiling mount

ACCESSORIES

A901-R-GM Gripple Suspension Mount Kit	Allows MXA901-R to be suspended using wire rope
A901-R-HCM Hard Ceiling Mount	Allows MXA901-R to be flush mounted in a drywall or hard ceiling
A901-R-PM Pole Mount Kit	Mounts MXA901-R to a threaded rod or NPT pole (not included)
A901-R-TB Tile Bridge	Mounts MXA901-R in a drop ceiling

Certified for Microsoft Teams

MXA710 LINEAR ARRAY MICROPHONE

THE SLIM ALTERNATIVE WHERE SPACE IS LIMITED.

The MXA710's sleek, linear form factor allows for placement virtually anywhere in a meeting space - on a ceiling or wall, around a display, or recessed into the table. Steerable Coverage™ technology allows pickup lobes to be easily adjusted to capture talkers around the room. Available in two lengths and three colors to suit different interior designs and mounting configurations. Onboard IntelliMix DSP provides all the signal processing needed for echo- and noise-free audio.

COVERAGE WHERE YOU WANT IT

SEAMLESS INTEGRATION

Steerable Coverage technology allows you to configure 4 or 8 pickup lobes that can be easily adjusted to capture talkers around the room.

Onboard IntelliMix DSP with automatic mixing, echo cancellation, noise reduction, and automatic gain control provides a pristine audio mix.

Programming-free LED mute sync with popular software codecs when connected to IntelliMix P300, IntelliMix Room or ANIUSB-MATRIX.

AVAILABLE MODELS

MXA710-2FT Linear Array Microphone, 2 foot / 60 cm (aluminum, black, white)

ACCESSORIES

MXA-MUTE Network Mute Button	Touch-sensitive mute button with program	
A710-TB Tile Bridge Ceiling and Suspension Mount Kit	Mounts MXA710 directly to ceiling tiles o	
A710-FM Flush Mount	Mounts MXA710 flush within a table, wall	
A710-DS Desk Stand	Mounts MXA710 to desk, credenza, or tab	
A710-MSA Mic Stand Adapter	Mounts MXA710 to any microphone stand	



FITS YOUR ROOM DESIGN

Sleek linear form factor allows for placement virtually anywhere - on the ceiling or wall, around a display, or recessed into the table.

Choose white, black, or aluminum finish. Wall mounting bracket included; other mounting options available.

MXA710-4FT Linear Array Microphone, 4 foot / 120 cm (aluminum, black, white)

mmable switch and LED can control one or multiple MXA microphones or DSP units

or suspended from ceiling grids; use one for MXA710-2FT or two for MXA710-4FT

ll or hard ceiling surface

nd in horizontal or vertical orientation

TABLE ARRAY MICROPHONE



MXA310 TABLE ARRAY MICROPHONE +

PREMIUM SOUND WITHIN YOUR REACH.

The MXA310 is the ideal solution when great sound needs to be close at hand. Steerable Coverage[™] technology allows up to four separate polar patterns to be easily adjusted to capture multiple talkers around the table. A unique toroid polar pattern rejects overhead noise while picking up talkers all around the table. Built-in Shure DSP utilities optimize voice quality, integrated mute buttons place controls within easy reach.

COVERAGE WHERE YOU WANT IT

Steerable Coverage technology allows you to configure 4 polar patterns to capture talkers around the table.

Unique toroid pattern picks up a 360-degree circle but rejects sound from overhead noise.

SHURE

ZOOM Certified



AVAILABLE MODELS

MXA310AL	Table Array Microphone (aluminum)		
MXA310B	Table Array Microphone (black)		
MXA310W	Table Array Microphone (white)		

A310-FM Flush Mount 1/2

NATURAL SOUND

Integrated automix output improves clarity by activating only mics being addressed.

Per-channel parametric EQ reduces noise pickup in rooms with poor acoustics.

FITS YOUR ROOM DESIGN

Programmable touchsensitive mute buttons can control one mic, all mics, or external devices.

Discreet design with side or bottom cable exit installs on top of table or flush-mounted.



DESIGNER SYSTEM CONFIGURATION SOFTWARE

ENABLE NEXT GENERATION AUDIO.

Design, deploy and commission installations consisting of Microflex® Ecosystem components with this free software. Save time, improve efficiency, and share room configurations seamlessly.

SOFTWARE



INTUITIVE WORKFLOW

Designer 6 allows online and offline design, routing, configuration, and push to online devices, all in one tool.



SEE CLEARLY

An improved view of audio routing and coverage areas provides complete system awareness.



PASS IT ON

Simplified file management and Windows and Mac OS compatibility make it easy to save and share room configurations.



CONFIDENT CONNECTIONS

802.1x protocol and additional features support enhanced network security.



CONQUER COMPLEXITY AND SCALE.

Control & monitor a wide variety of features and parameters for Shure devices - whether on premises or remotely. Open architecture allows integration with 3rd party devices and platforms to enable comprehensive and customizable system management.



RESTFUL API

Highly scalable and interactive with other control and monitoring systems that are already in use across enterprise applications.

STREAMLINED SET-UP



resources.

ENHANCED NETWORK SECURITY

across an enterprise.

Ease & speed of install enables savings on deployment efforts, time on-premises, and


Features including HTTPS, 802.1x, and SRP ensure robust network security protocols



BETTER TOGETHER.

Shure networked audio interfaces, processors, and software integrate with Microflex Advance microphones to provide a powerful conferencing solution that works with your favorite hardware or software collaboration platform.



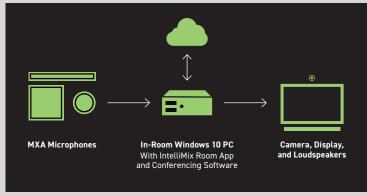

Windows is a registered trademark of Microsoft

Use IntelliMixRoom **Audio Processing Software**

IntelliMix Room puts IntelliMix DSP on the same Windows 10 device that runs your collaboration application or software codec. It accommodates multiple MXA microphones and provides automatic mixing, echo cancellation, noise reduction with Denoiser, and more for each individual microphone channel.

1 MXA Microphone Room PC or Hardware Codec



Use ANIUSB-MATRIX Audio Network Interface

The ANIUSB-MATRIX connects the output of a Microflex Advance microphone to a room computer via USB or to a hardware video codec via Dante or analog I/O. The built-in matrix mixer allows you to route additional audio sources to any output.



Room PC or

Hardware Codec

Use IntelliMix P300 Audio Conferencing Processor

The P300 connects the automix outputs from multiple MXA microphones to a room computer via USB or to a hardware video codec via Dante or analog I/O. Builtin IntelliMix DSP selects the best microphone for each talker and applies acoustic echo cancellation and noise reduction for a pristine audio mix.

INTEGRATION


Multiple MXA Microphones Windows 10/11 Room PC

INTEGRATION

MXN5W-C NETWORKED CEILING LOUDSPEAKER +

The MXN5W-C Networked Ceiling Loudspeaker provides high-quality speech reproduction for AV conferencing applications without the need for a separate amplifier or an outboard DSP. The PoE-powered MXN5 is the ideal loudspeaker solution when used as part of a Shure networked conferencing audio system. Combined with Microflex Advance Array Microphones and IntelliMix® DSP, the full Shure networked systems ecosystem delivers premium audio performance with unmatched ease of deployment, with the added confidence of Shure Audio Encryption and Dante Domain Manager compatibility.



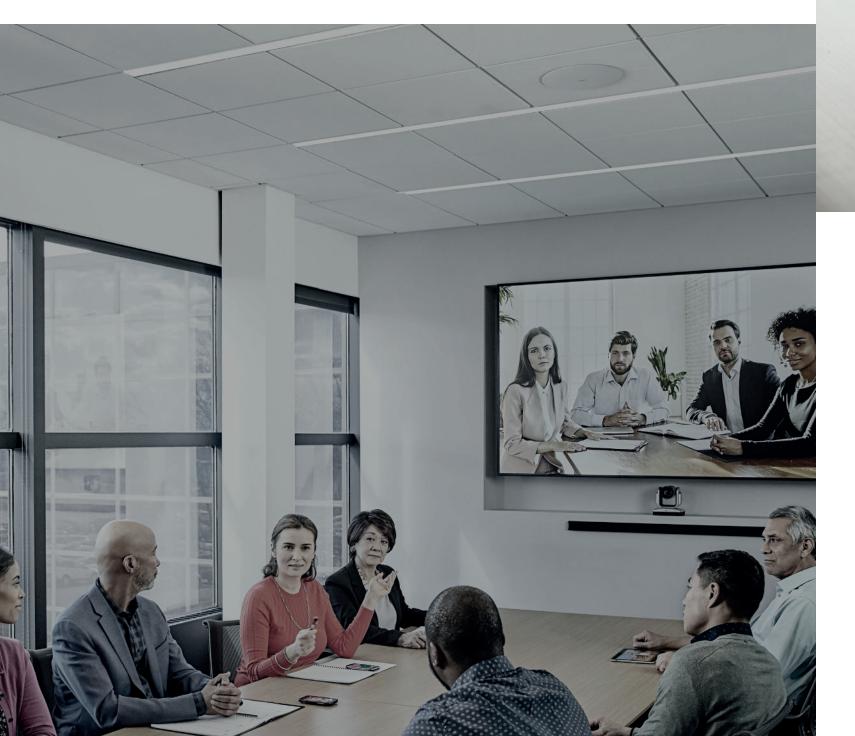

MXA NETWORK MUTE BUTTON +

Features

•

•

•

•

•

.

•

The MXA Network Mute Button is a configurable PoE-powered mute button accessory designed for Shure networked audio products, including Microflex® Advance™ Array Microphones as well as the IntelliMix[®] P300 and IntelliMix Room DSPs, and ANIUSB-MATRIX. One or many of the low-profile touch sensitive mute buttons can be configured to mute one or multiple microphones, depending on user needs or room configurations.





INTEGRATION




- Designer System Configuration software for easy setup and configuration PoE powered
- Compatible with third party control systems via programmable control strings
- LED status ring with confi gurable colors and brightness
- Configurable as toggle, push to talk and push to mute functionality
- IP1X rated
- Easy table installation in 1" (25mm) or 7/8" (22mm) holes



APPLICATION FLEXIBILITY

Match single or multiple arrays to the AV conferencing needs of rooms of any size, configuration or activity: formal presentations, intimate discussions, distance learning or collaborative work.

TABLE ARRAY COVERAGE MAPS +1

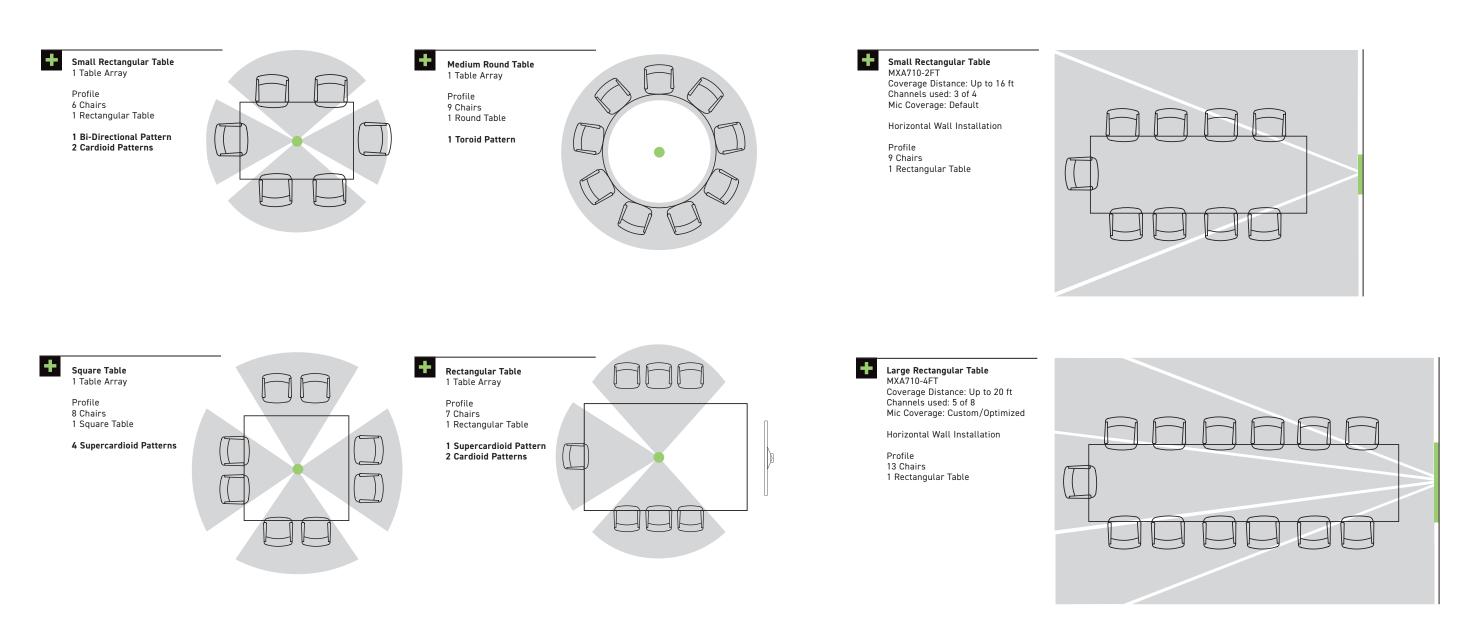

LINEAR ARRAY COVERAGE MAPS

+1

APPLICATIONS

MXA901 CEILING ARRAY MICROPHONE COVERAGE MAPS

+

Small Conference Room

Profile

6 Chairs

1 Square Table

1 Coverage Area

1 MXA901 Ceiling Array Microphone

MXA920 CEILING ARRAY COVERAGE MAPS + + Large Conference Room Large Conference Room 2 MXA901 Ceiling Array Microphones 2 MXA920 Ceiling Arrays Profile 28 Chairs

AAAAAAAAAAAA

1 Rectangular Table 2 Coverage Areas



2 Coverage Areas



Medium Conference Room 1 MXA920 Ceiling Array

Profile

14 Chairs 1 Rectangular Table

1 Coverage Area

÷

÷

Profile 21 Chairs

3 Coverage Areas


MXA902 INTEGRATED CONFERENCING CEILING ARRAY COVERAGE MAPS


Small Conferent 1 MXA902 Cei			
Profile 6 Chairs 1 Square Tabl	e		
1 Coverage A	rea		
()			
		U	

÷ Medium Conference Room 1 MXA902 Ceiling Array Profile

10 Chairs 1 Rectangular Table

1 Coverage Area





Profile 16 Chairs

5 Coverage Areas

* Coverage Capabilities


Installed at a height of 3 meters (ten feet), Ceiling Arrays capture audio from seated participants to a recommended area of 9 meters (30 feet) in diameter, meeting the STIPA "A" intelligibility rating.

** Note:

Ceiling Arrays are capable of picking up participants beyond 9 meters (30 feet).


** Room conditions: RT60 (reverb time) = 500 ms @ 1kHz, weighted room noise = 40dBSPL(A). IEC-602682-16.





Videoconference Room 1 MXA920 Ceiling Array

3 Rectangular Tables



Classroom / Presentation Room 1 MXA920 Ceiling Array

4 Rectangular Tables





MXA310 TABLE ARRAY MOUNTING OPTIONS

TABLE ARRAY MOUNTING KIT (INCLUDED) +

Cable management solutions for on-the-table or through-the-table applications; includes mounting tube/wingnut.

MXA310 retrofits existing Shure table mounted MX395, MX396, MX392 boundary microphones.

Allows MXA310 Table Array to be mounted flush in the table; includes rubber isolation to prevent mechanical vibrations. Available in black and aluminum finishes; paintable to match table surface.



MXA710 LINEAR ARRAY MOUNTING OPTIONS











CEILING ARRAY MOUNTING OPTIONS

A variety of mounting accessories are available to suit different ceiling types.







